



2011/12

CAST IRON WOOD STOVES & INSERTS

· Where Tradition, Craftsmanship and Performance meet.



It all began in the 1880's

when the community of Alderlea was just a whistle stop on Canada's rugged West Coast—today those early days of Alderlea live on in what is now the Cowichan Valley, home to Pacific Energy.

Alderlea woodstoves have redefined the centuries-old charm of the cast iron stove by wrapping a graceful cast iron profile around legendary Pacific Energy steel fireboxes. This innovation delivers both radiant and convection heat for powerful performance.

In true pioneer style, The Alderlea has a practical side – a large concealed cook top, food warming shelves, an air-wash for a clear view of the fire, and an easy cleaning innovative ash disposal system.

Powered by Pacific Energy's proven steel fireboxes, the Alderlea collection will provide many years of low-maintenance operation, while delivering the ease of use and exceptional heat that comes with over 30 years of woodburning experience.

For your assurance of warmth and peace of mind, we further our commitment to quality and innovation with Pacific Energy's Limited Lifetime Warranty—we know of no better cast iron woodstove guarantee.



Alderlea T44-5	
Alderlea T56-7	
Alderlea T68-9	
Alderlea T5 Insert	
Floor Protectors	
Minimum Clearances13	
A History of Innovation14	
Efficient Wood Heating15	





What is BTU?

The British thermal unit (symbol BTU or Btu) is a traditional unit of energy equal to about 1,055 joules. It is approximately the amount of energy needed to heat 1 pound (0.454 kg) of water (i.e. exactly one tenth of a UK gallon, or around 0.1198 US gallons) from 39 to 40 ° F (3.8 to 4.4° C).

In North America, the term "BTU" is used to describe the heat value (energy content) of fuels, and also to describe the power of heating and cooling systems, such as furnaces, stoves, barbecue grills, and air conditioners.

What is the difference between EPA test fuel and cord wood?

All wood is not created equal and burn results vary due to the type of wood, its density and its moisture content. To reduce burn rate variations, the EPA has developed a standardized wood load for testing. Uniform pieces of Douglas Fir lumber, with specific moisture content, are stacked into a precise configuration to minimize any fluctuations caused by volume and wood type.

* Heating Capacity will vary depending on type of wood, floor plan, house layout, heat loss of home, and geographical location.

SMALL STOVES

Alderlea T4 Series

Firebox Size: 1.5 cubic ft For heating up to 1500 sq. ft.





Alderlea T4

Heat Output* Cord Wood 56,000 BTU EPA Test Fuel 26,300 BTU

Heat Output* Cord Wood 56,000 BTU 26,300 BTU **EPA Test Fuel**

Alderlea T4 Classic

2.9 gm/hr.

Efficiency (LHV) 80.7% Efficiency (LHV) 80.7% **Emissions** 2.9 gm/hr. **Emissions** Log Size (max) 18 inches Log Size (max) 18 inches

For Spaces up to For Spaces up to 1500 square feet. 1500 square feet.

→ Page 4

MEDIUM STOVES

Alderlea T5

Heat Output*

EPA Test Fuel

Cord Wood

Alderlea T5 Series

Firebox Size: 2.1 cubic ft For heating up to 2000 sq. ft.





Alderlea T5 Classic

Heat Output* Cord Wood 72,000 BTU **EPA Test Fuel** 34,600 BTU

Efficiency (LHV) 82.6% Efficiency (LHV) 82.6%

Emissions 3.4 gm/hr. **Emissions** 3.4 gm/hr. Log Size (max) 18 inches Log Size (max) 18 inches

For Spaces up to For Spaces up to 2000 square feet. 2000 square feet.

72,000 BTU

34,600 BTU

→ Page 6

LARGE STOVES

Alderlea T6

Firebox Size: 3.0 cubic ft. For heating up to 3000 sq. ft.



Alderlea T6

Heat Output* Cord Wood 99,000 BTU 38,500 BTU **EPA Test Fuel**

Efficiency (LHV) 80.4%

Emissions 3.9 gm/hr. Log Size (max) 18-20 inches

For Spaces up to 3000 square feet.

→ Page 8

INSERTS

Alderlea T5 Series

Firebox Size: 2.1 cubic ft For heating up to 2000 sq. ft.



Log Size (max) 18 inches



Alderlea T5

Heat Output* Heat Output* Cord Wood Cord Wood 72,000 BTU EPA Test Fuel 34,600 BTU **EPA Test Fuel** Efficiency (LHV) 82.6%

Efficiency (LHV) 82.6%

Alderlea T5 Classic

72,000 BTU

34,600 BTU

Emissions 3.4 gm/hr. **Emissions** 3.4 gm/hr. Log Size (max) 18 inches

For Spaces up to For Spaces up to 2000 square feet. 2000 square feet.

→ Page 10








The radiant heat of cast iron combined with the convective warmth of steel. The T4 is designed for spaces up to 1500 ft².

HEAT OUTPUT

56000 BTU 26300 BTU (EPA Test Fuel)

EFFICIENCY/EMISSIONS

3.4 gm/hr.



HEATING CAPACITY LOG SIZE (max) FIREBOX SIZE FLUE DIAMETER

1,500 sq.ft. 18 in. 1.5 Cubic ft.

STANDARD FEATURES

- Pacific Energy's legendary steel firebox
- Reliable, durable, non-catalytic technology
- Industry-leading limited lifetime warranty Rich metallic black cast iron, Majolica or Ebony
- Floating firebox for extended stove life
- Air wash system for super clean glassConcealed cook top , fits 6" x 13" pan

• Temperature actuated 125 cfm variable

- Swing out food warming shelves
- Easy cleaning innovative ash system and chute
- · Close wall clearances, without added expense of
- Steel baffle and 304 Stainless Steel insulation cover
- Inside and outside combustion air capable
- Mobile home approved

FINISHES | COLOURS

Metallic Cast Iron







 Right swing door available* Screen Door

OPTIONS

*only available on metallic cast iron finish







ALDERLEA T4. OUSSIC

The timeless beauty of the cast iron stove combined with legendary Pacific Energy Firebox technology allows you to heat your home with maximum strength and unmatched durability. Gracefully clad in a choice of two lustrous porcelain enamel finishes, the T4 Classic is big on performance and style.






Built around Pacific Energy's legendary Super Series steel firebox, the Alderlea T5 combines the very best features of both cast iron and steel stoves. Beauty and strength.

HEAT OUTPUT

72000 BTU 34600 BTU (EPA Test Fuel)

EFFICIENCY/EMISSIONS



HEATING CAPACITY LOG SIZE (max) FIREBOX SIZE FLUE DIAMETER

2,000 sq.ft. 18 in. 2.1 Cubic ft.

6 in.

STANDARD FEATURES

- Pacific Energy's legendary steel firebox
- Reliable, durable, non-catalytic technology
- Industry-leading limited lifetime warranty Rich Metallic Black cast iron, Majolica or Ebony porcelain enamel finish
- Floating firebox for extended stove life
- Air wash system for super clean glassConcealed cook top, fits 9" x 11" pan

- Swing out food warming shelves
- Easy cleaning innovative ash system and chute
- Close wall clearances, without added expense of • 304 Stainless Steel baffle, insulation cover and
- Inside and outside combustion air capable
- Mobile home approved





OPTIONS

- Temperature actuated 125 cfm variable speed blower
- Right swing door available*
- Screen Door

*only available on metallic cast iron finish



FINISHES | COLOURS

Metallic Cast Iron







ALDERLEA T5. OUSSIC

Our best selling Alderlea T5 is now wrapped in your choice of Majolica or Ebony porcelain enamel. The jewel like finish adds another outstanding choice to an already outstanding list of performance and design features. Enjoy years of carefree warmth with an easyto-light, easy-to-load reliable source of heat.





Elegant, historic cast iron styling that adds to the decor of any room, the T5 offers radiant and convective heat, a huge glass for a full view of your fire, a concealed cook top

- Contract of the state of the

ALDERLEA

for peace of mind during power outages, easy-lighting, all in a proven clean, long-burning heater with 30 years of wood stove technology behind it.



Patented Extended Burn Technology (EBT) gives the Alderlea T6, the largest of the Alderlea cast iron stoves, all-night burns with maximum heating capacity.

HEAT OUTPUT



97000 BTU 37500 BTU (EPA Test Fuel)

EFFICIENCY/EMISSIONS

80.3%

3.56 gm/hr.

HEATING CAPACITY LOG SIZE (max) FIREBOX SIZE FLUE DIAMETER

3,000 sq.ft. 18-20 in. 3.0 Cubic ft.

STANDARD FEATURES

- Pacific Energy's legendary steel firebox
- Reliable, durable, non-catalytic technology
- Industry-leading limited lifetime warranty • Rich metallic black cast iron finish
- Floating firebox for extended stove life
- Air wash system for super clean glassExtended Burn Technology (EBT)
- Concealed cook top, fits 12" x 15" pan

Swing out food warming shelves

- Easy cleaning innovative ash system and chute
- Close wall clearances, without added expense of
- 304 Stainless Steel baffle, insulation cover and flame shield

 Inside and outside combustion air capable
- Mobile home approved

FINISHES | COLOURS

OPTIONS

- Temperature actuated 125 cfm variable speed blower
- Right swing door available
- Screen Door



Cast Iron







Huge glass opens up the view of your fire. Large cook top surface comfortably fits a large casserole pan with warming space to spare. The Alderlea T6, and all Pacific

Energy wood stove products, are backed by our Limited Lifetime Warranty - our promise of many years of wood heat comfort.



Elegant, traditional cast iron styling combined with a clean

glass door and legendary Pacific Energy performance, are sure

to make this into the coziest room in your house.

Transform your fireplace into an efficient heating system with the Alderlea T5 Insert.

HEAT OUTPUT

72000 BTU 34600 BTU (EPA Test Fuel)

EFFICIENCY/EMISSIONS



HEATING CAPACITY LOG SIZE (max) FIREBOX SIZE FLUE DIAMETER

2,000 sq.ft. 18 in. 2.1 Cubic ft. 6 in.


3.4 gm/hr.

STANDARD FEATURES

- Pacific Energy's legendary steel firebox
- Reliable, durable, non-catalytic technology
- Industry-leading limited lifetime warranty Rich Metallic Black cast iron, Majolica or Ebony porcelain enamel finish
- Air wash system for super clean glassTemperature actuated 160 cfm variable speed blowers

User friendly one-touch control

- Easier, safer straight in loading
- Stainless steel floating firebox components for
- Inside and outside combustion air capable

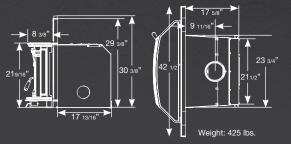

OPTIONS

- Temperature actuated 125 cfm variable speed blower
 Screen Door
- Oversized Surround Top (42 1/2" W x 34 1/8" H)
- Standard Surround Top (42 1/2" W x 30 3/8" H)




FINISHES | COLOURS





Ebony Porcelain Majolica Porcelain






Heat beautifully and efficiently with the charm of cast iron clad in lustrous porcelain enamel. With two rich, porcelain enamel finishes to choose from, Majolica or Ebony, the Alderlea T5 Classic Insert is a striking design option to heat any space.






FLOOR PROTECTOR

The charts shown below give the required dimensions of floor protector sizes based on various appliance installations.



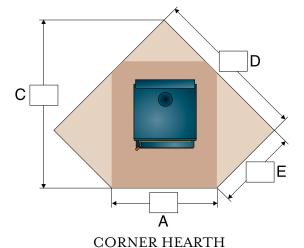

CANADA

Non-combustible ember protection must be used. (Check local building codes for acceptable construction materials.)

This protection must be under the stove and must extend 18" on the firing side and 8" to the other sides.

STRAIGHT HEARTH	ALDEI	RLEA T4	ALDEF	RLEA T5	ALDERLEA T6		
(Extended to wall unless noted)	Α	В	Α	В	Α	В	
Minimum (Not extended)	40"	43 1/4"	40"	50 1/2"	43"	54 3/4"	
Residential, single wall, vertical connector	40"	50 1/4"	40"	54 1/2"	43"	55 3/4"	
Residential, single wall, horizontal connector	40"	48 1/4"	40"	50 1/2"	43"	55 3/4"	
Residential, double wall, vertical connector	40"	42 1/4"	40"	47 1/2"	43"	54 3/4"	
Residential, double wall, horizontal connector	40"	42 1/4"	40"	47 1/2"	43"	54 3/4"	
Alcove, double wall, connector	40""	46 1/4"	40"	52 1/2"	43"	56 3/4"	
Mobile home	40"	47 1/4"	40"	50 1/2"	43"	56 3/4"	

CORNER HEARTH		ALDEF	RLEA T4			ALDER	LEA T5		ALDERLEA T6				
(Extended to wall unless noted)	Α	C	D	E	Α	C	D	E	Α	С	D	E	
Minimum (Not extended)	40"	58 1/8"	55 1/4"	27"	40"	63 5/8"	59 1/8"	30 7/8"	43"	69"	64"	33 1/2"	
Residential, single wall, vert/horz connector	40"	60 7/8"	57 1/4"	29"	40"	67 7/8"	62 1/8"	33 7/8"	43"	66"	62"	31 1/2"	
Residential, double wall, vert/horz connector	40"	51"	50 1/4"	22"	40"	58"	55 1/8"	26 7/8"	43"	64 3/4"	61"	30 1/2"	
Mobile home	40"	58 1/8"	55 1/4"	27"	40"	63 5/8"	59 1/8"	30 7/8"	43"	69"	64"	33 1/2"	

USA

Non-combustible ember protection must be used. (Check local building codes for acceptable construction materials.)


This protection must be under the stove and must extend 16" to the front and 8" to the sides of the fuel loading door opening. This protection is also required under the chimney connector and 2" beyond each side.


STRAIGHT HEARTH	ALDER	RLEA T4	ALDER	LEA T5	ALDERLEA T6		
(Extended to wall unless noted)	A	В	Α	В	Α	В	
Minimum (Not extended)	32"	33 1/4"	34"	40 1/2"	35"	40 1/2"	
Residential, single wall, vertical connector	32"	48 1/4"	34"	52 1/2"	35"	49 1/2"	
Residential, single wall, horizontal connector	32"	46 1/4"	34"	48 1/2"	35"	49 1/2"	
Residential, double wall, vertical connector	32"	40 1/4"	34"	45 1/2"	35"	48"	
Residential, double wall, horizontal connector	32"	40 1/4"	34"	45 1/2"	35"	48"	
Alcove, double wall, connector	32"	44 1/4"	34"	50 1/2"	35"	50 1/2"	
Mobile home	32"	45 1/4"	34"	48 1/2"	35"	50 1/2"	


CORNER HEARTH		ALDERI	EA T4			ALDERL	.EA T5		ALDERLEA T6				
(Extended to wall unless noted)	Α	C	D	E	Α	C	D	E	Α	C	D	E	
Minimum (Not extended)	32"	53 1/4"	50 3/8"	25"	34"	49 7/8"	47 3/8"	23 1/4"	35"	62 3/4"	56 3/4"	32"	
Residential, single wall, vert/horz connector	32"	58 7/8"	53"	30 3/8"	34"	65 7/8"	58 3/8"	34 1/4"	35"	60"	54 3/4"	30"	
Residential, double wall, vert/horz connector	32"	49"	46"	23 3/8"	34"	55 5/8"	51 3/8"	27 1/4"	35"	58 1/2"	53 3/4"	29"	
Mobile home	32"	56 1/8"	51"	28 3/8"	34"	61 1/4"	55 3/8"	31 1/4"	35"	62 3/4"	56 3/4"	32"	

Note: In most practical applications the floor protection will extend to the back wall. In Canada and U.S.A. it is not required that the floor protection extend to the wall and in such cases floor protector sizes may vary slightly. Please refer to manual for details. Manuals are available on our website: www.pacificenergy.net

MINIMUM CLEARANCES TO COMBUSTIBLES







RESIDENTIAL

SINGLE WALL CONNECTOR*

* Pipe shield may be required – consult local codes

Straight Installation Vertical Connector							nstallatio Connect			rner Ilation	Alcove Installation				
MODEL	From top of stove to ceiling	Α	В	С	D	Α	В	C	D	E	F	G	Н	1	۲
T4	56 3/4" (1441mm)	15"	14"	20 3/4"	26"	13"	14"	18 3/4"	26"	10"	22 5/8"	N/A	N/A	N/A	N/A
T5	55 1/4" (1403 mm)	12"	18"	22"	30"	8"	14"	18"	26"	11"	25"	N/A	N/A	N/A	N/A
Т6	56 1/2"(1409 mm)	9"	14"	17 3/4"	28 3/4"	9"	14"	17 3/4"	28 3/4"	6"	20 1/4"	N/A	N/A	N/A	N/A

RESIDENTIAL

DOUBLE WALL CONNECTOR


	Straight Installation Vertical Connector				Straight Installation Horizontal Connector				Corne Installa	-	Alcove Installation **				
MODEL	From top of stove to ceiling	A	В	C	D	A	В	С	D	E	F	G	Н		J
T4	56 3/4" (1441mm)	7"	12"	12 3/4"	24"	7"	12"	12 3/4"	24"	3"	15 5/8"	11"	12"	16 3/4"	24"
T5	55 1/4" (1403 mm)	5"	14"	15"	26"	5"	14"	15"	26"	4"	18"	10"	16"	20"	28"
Т6	56 1/2"(1409 mm)	7 1/2"	13"	16 1/4"	27 3/4"	7 1/2"	13"	16 1/4"	27 3/4"	5"	19 1/4"	10"	16"	18 3/4"	30 3/4"

^{**} Please refer to manuals for minimum height and maximum depth of alcove.

MOBILE HOME

DOUBLE WALL CONNECTOR

	Straight Installation Vertical Connector						•	tallation onnector		Corne Installa		Alcove Installation				
MODEL	From top of stove to ceiling	Α	В	C	D	Α	В	C	D	E	F	G	Н	1	J	
T4	56 3/4" (1441mm)	12"	12"	17 3/4"	24"	N/A	N/A	N/A	N/A	8"	20 5/8"	N/A	N/A	N/A	N/A	
T5	55 1/4" (1403 mm)	8"	16"	18"	28"	N/A	N/A	N/A	N/A	8"	22"	N/A	N/A	N/A	N/A	
Т6	56 1/2"(1409 mm)	10"	18"	18 3/4"	32 3/4"	N/A	N/A	N/A	N/A	8"	22 1/4"	N/A	N/A	N/A	N/A	

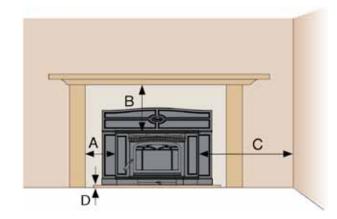

	Minimum clearances to combustibles (Measured from insert body)										
Α	Side facing	6.5 in.	165 mm								
В	Mantel	16 in.	406 mm								
С	Adjacent Side Wal	20.5 in.	521 mm								
D	Fireplace Hearth Pad	2 in.	51 mm								



A History of Innovation

For more than 30 years Pacific Energy has challenged, then exceeded the traditional assumptions about wood heat. Our history of innovation is evident in our industry-leading features, our choice of the finest materials, our close eye on environmental responsibility, and our commitment to creating efficient and convenient appliances that fit your style and warm your life.

The result is a series of industry firsts, accomplished through our on-going mission to provide you with the best possible wood burning technology.

First Glass Air Wash System

because a beautiful fire should be seen

First Floating Firebox Design


longer stove life with unrestricted thermal expansion

First Air Tight Ash Removal System

for quick, clean maintenance of your stove


First Extended Burn Technology

maximum efficiency for longer burns

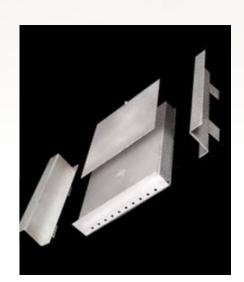

Pacific Energy's Floating Firebox


eliminates metal fatigue caused by expansion and contraction during heating and cooling. Many of the firebox components are manufactured with corrosion-resistant 304 Stainless Steel. This combination of innovation and attention to detail dramatically extends the life of your appliance.

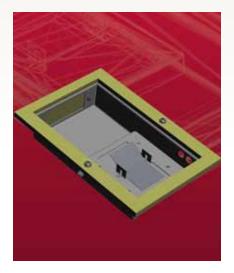

Pacific Energy's patented Extended Burn Technology


is available exclusively on T6 wood stoves. EBT regulates the flow of combustion air throughout the burn cycle and increases burn time. With EBT, your T6 will burn longer between loads and deliver more efficient fuel consumption.

Patent Pending

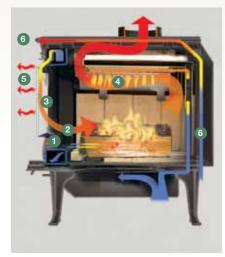

The Pacific Energy Integrated Combustion System

- 1 Boost Air
- 2 Main Combustion Air
- 3 Air-Wash System
- 4 Secondary Combustion Air
- 5 Radiant Heat
- 6 Convection Heat

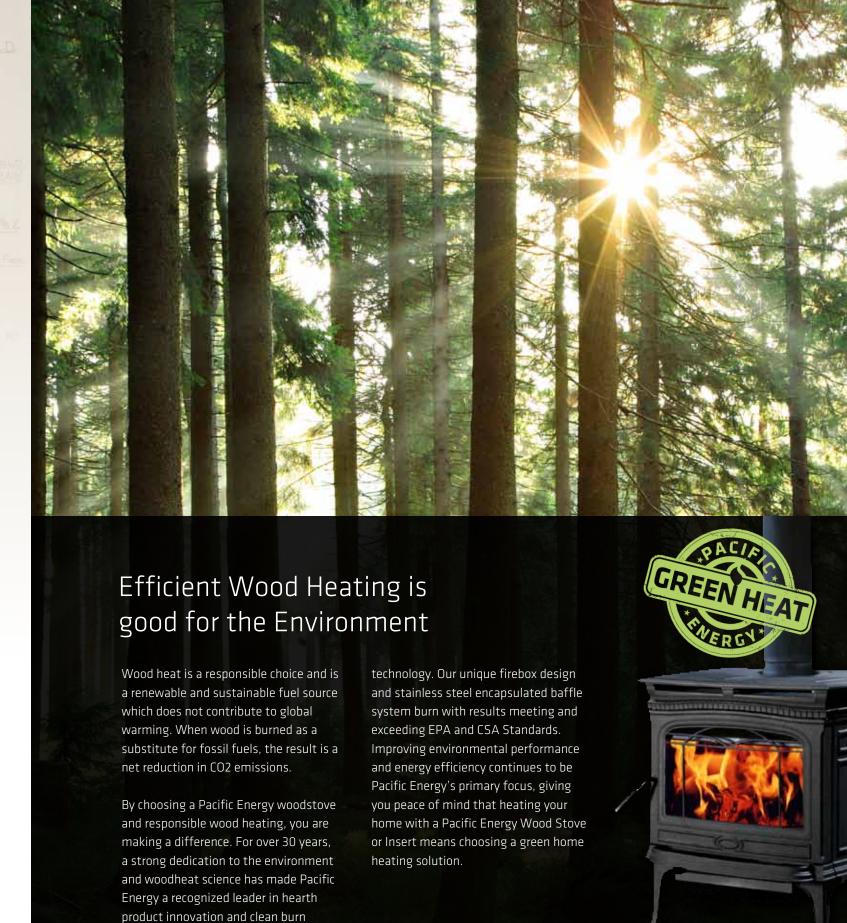



CAST IRON WOOD STOVES & INSERTS

——— Where Tradition, Craftsmanship and Performance meet. ——



For your assurance of warmth and peace of mind, we further our commitment to quality and innovation with Pacific Energy's Limited Lifetime Warranty — we know of no better cast iron woodstove guarantee.



PACIFIC ENERGY FIREPLACE PRODUCTS LTD.

pacificenergy.net 1-888-223-0088